

PRODUCT BRIEF

Board Formed Concrete

Pre-cast, lightweight concrete panels imposed with a wood grain texture are applied to walls, fireplaces, and more. Suitable for non-combustible interior and exterior applications.

—

Recommended Sizes

Available in 5/8" (16mm) thickness in the following dimensions:

6" x 60" (150mm x 1525 mm)

8" x 84" (205mm x 2135 mm)

Made to order. Custom sizes available

Weight

6" x 60" Panel: 8.2kg (18.04 lbs)

8" x 84" Panel: 15.3kg (33.67 lbs)

Joint Options

Best suited to be installed with butt joints or mitered joints.

Prepared Substrate

The substrate should be smooth, plumb, level and stable prior to installation.

Adhesive



We recommend an instant grab MS Polymer adhesive such as Xcel IGA for both interior and exterior use.

Caulking


Colour matched and sanded. We recommend using MAPEI Keracaulk or TEC Accucolour.

Sealer


Concrete is a porous material, and most of our concrete products are sealed before shipping or installation unless discussed with the client. We use various sealers based on the concrete application.

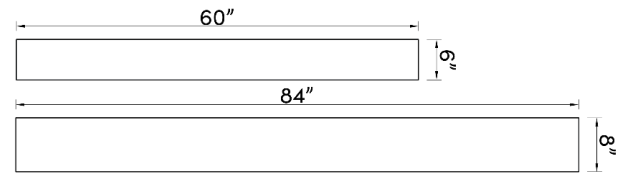

Butt Joint



Miter Joint

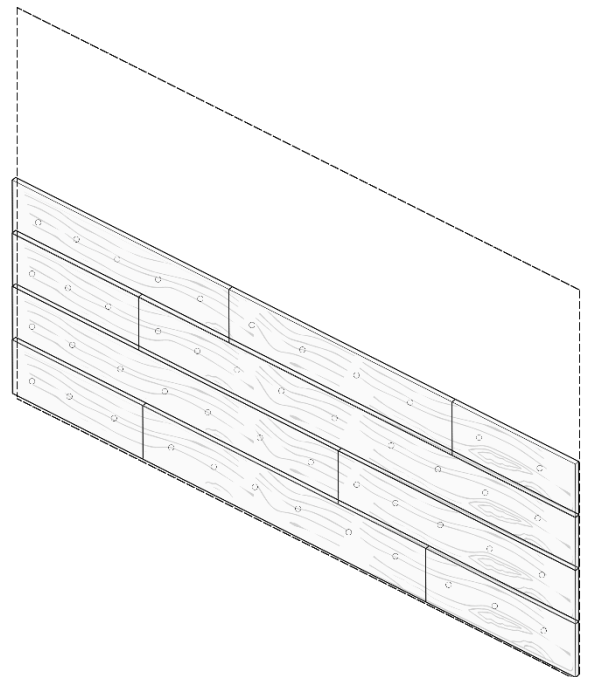

—